

—TORLYS—
SUPERSOLID
H A R D W O O D



A Modern Classic

Introducing —TORLYS— SUPER SOLID H A R D W O O D

Stunning.

You've Never Seen Hardwood Like This.

Long wide planks. With 100% hardwood core for stability and long-lasting performance, finished beautifully with Best-in-Class Klumpp top-coat.

Sustainable.

Better Floors For a Better World.

All hardwood - with a smart-cut hardwood core and precision-engineered to reduce environmental impact.

Superior.

E-Lock Hardwood Inside.

What you don't see makes a difference. TORLYS patented E-Lock Hardwood core is innovative engineering that ensures superior performance for decades.

Cup, Gap & Crack Resistant

E-Lock core and quality dry-sawn top layer resists gapping, cracking and splitting - extra-durable for any climate.

Install in All Levels of Your Home.

SuperSolid Hardwood can be installed above, on or below grade - even over radiant heat.





BEACH GROVE OAK* EE16003



WILDWOOD OAK* EE16150




SUPER SOLID

H A R D W O O D

Welcome to the very best in hardwood,
beautifully textured with wire-brushed
or handscraped finishes. Every
exquisitely crafted plank is protected
by the highest performance
KLUMPP finish.

BEACH GROVE OAK* EE16003

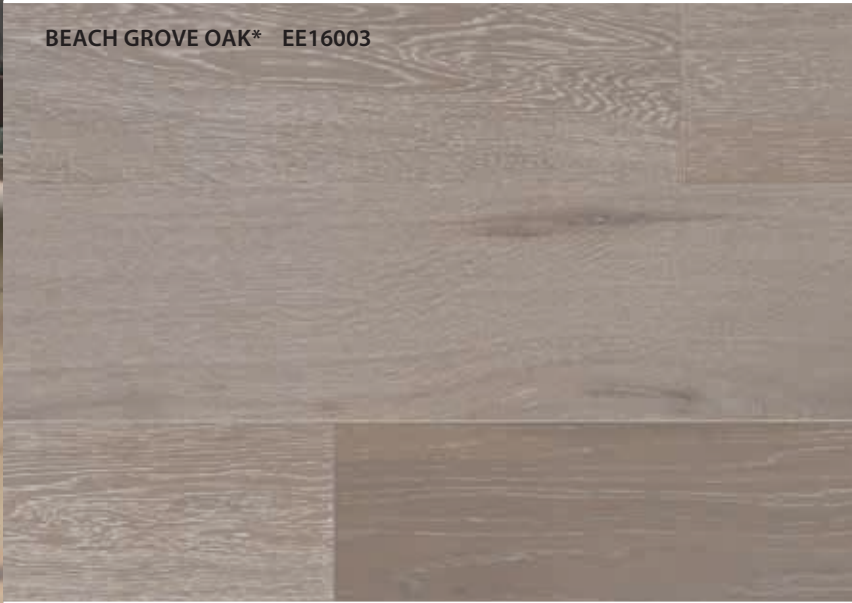

LIGHTNING RIDGE OAK* EE16005



SuperSolid 7 Hardwood

CLAYBRIDGE OAK* EE16006



SEDGEBROOK OAK* EE16009



Species

White Oak

Surface Finish

Wirebrushed

Beach Grove Oak* EE16003
Lightning Ridge Oak* EE16005
Claybridge Oak* EE16006
Portland Oak* EE16154

Handscraped

Sedgbrook Oak* EE16009
Wildwood Oak* EE16150
Ragged Rock Oak* EE16151
Harbour View Oak* EE16152

Wear Layer

**Guaranteed
re-sandable
up to 4 times**

* These floors have high shade variation. Visit torlys.com for more information.

3/4" (thickness) x 7-1/2" (width) x Random length (24" to 75", Average length 65")

19mm (thickness) x 190mm (width) x Random length (600mm to 1900mm, Average length 1663mm)

SuperSolid 7 Hardwood

WILDWOOD OAK* EE16150



RAGGED ROCK OAK* EE16151



HARBOUR VIEW OAK* EE16152



PORTLAND OAK* EE16154



Outstanding Quality.
Modern Style.




SAYBROOK OAK* EE-SS6-421



SUPER SOLID

H A R D W O O D

Beautifully styled hardwood in 6 inch widths create a floor that will stand the test of time in both looks and performance.

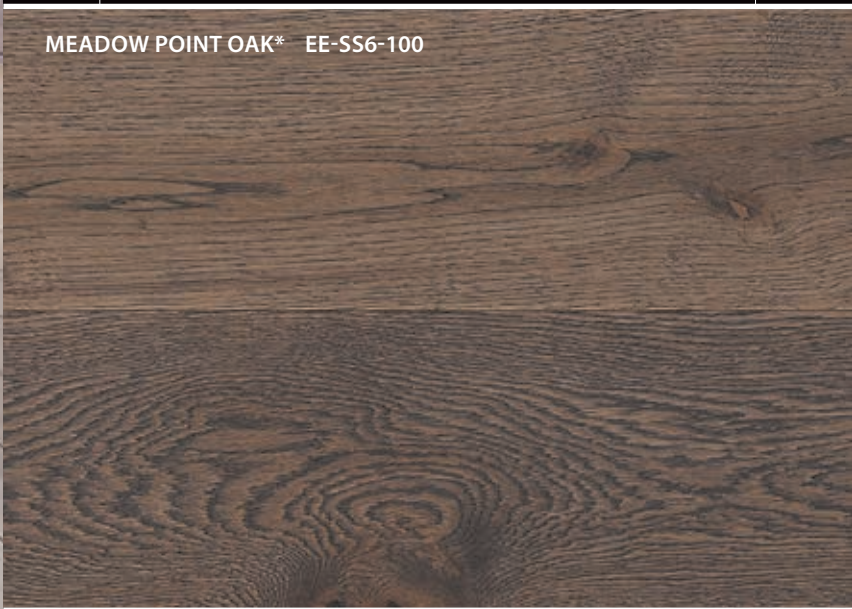

MEADOW POINT OAK* EE-SS6-100




OLD POST OAK* EE-SS6-101

SuperSolid 6 Hardwood

WATERBURY OAK* EE-SS6-102



HERON GLEN OAK* EE-SS6-420

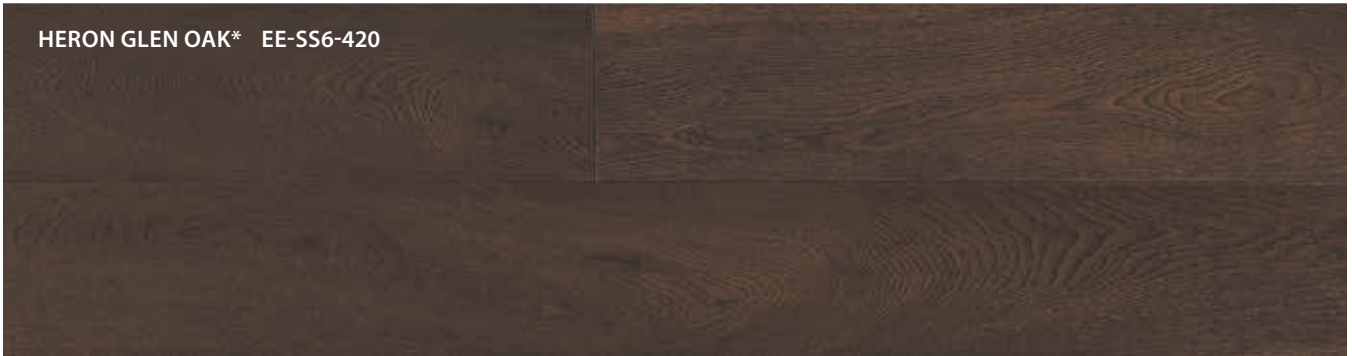

Species

White Oak

Birch

Surface Finish

Wirebrushed

Meadow Point Oak*	EE-SS6-100
Old Post Oak*	EE-SS6-101
Waterbury Oak*	EE-SS6-102
Heron Glen Oak*	EE-SS6-420
Saybrook Oak*	EE-SS6-421
Trails End Oak*	EE-SS6-422

Smooth

Island View Birch*	EE-SS6-550
Mayette Birch*	EE-SS6-552

Wear Layer

**Guaranteed
re-sandable
up to 4 times**

* These floors have high shade variation. Visit torlys.com for more information.

3/4" (thickness) x 5-7/8" (width) x Random length (24" to 75")

19mm (thickness) x 150mm (width) x Random length (600mm to 1900mm)

SuperSolid 6 Hardwood

SAYBROOK OAK* EE-SS6-421




TRAILS END OAK* EE-SS6-422



ISLAND VIEW BIRCH* EE-SS6-550



MAYETTE BIRCH* EE-SS6-552

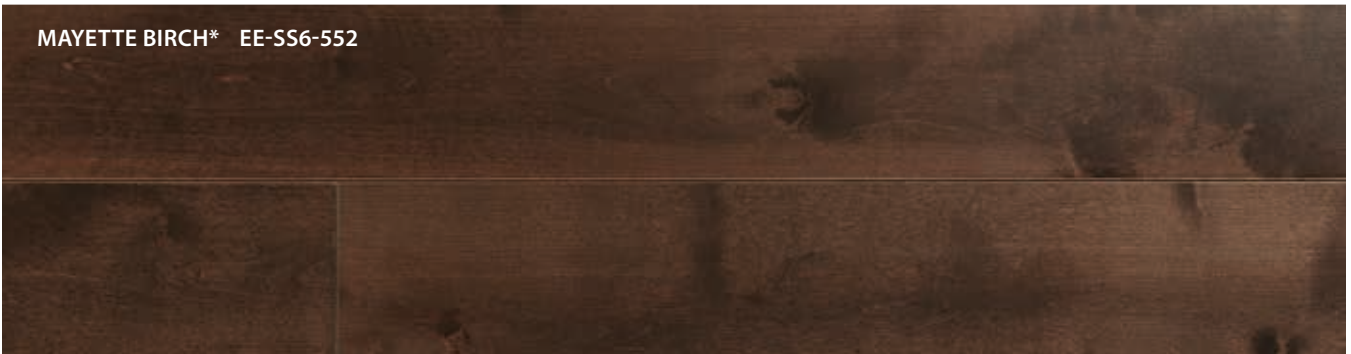

Designer looks.
Exquisite craftsmanship.




COVE SPRINGS OAK* EE14241




SUPER SOLID

H A R D W O O D

A beautiful collection of stylish,
environment-friendly floors
– in designer-selected colours,
lightly-distressed wirebrushed and
handscraped oak.

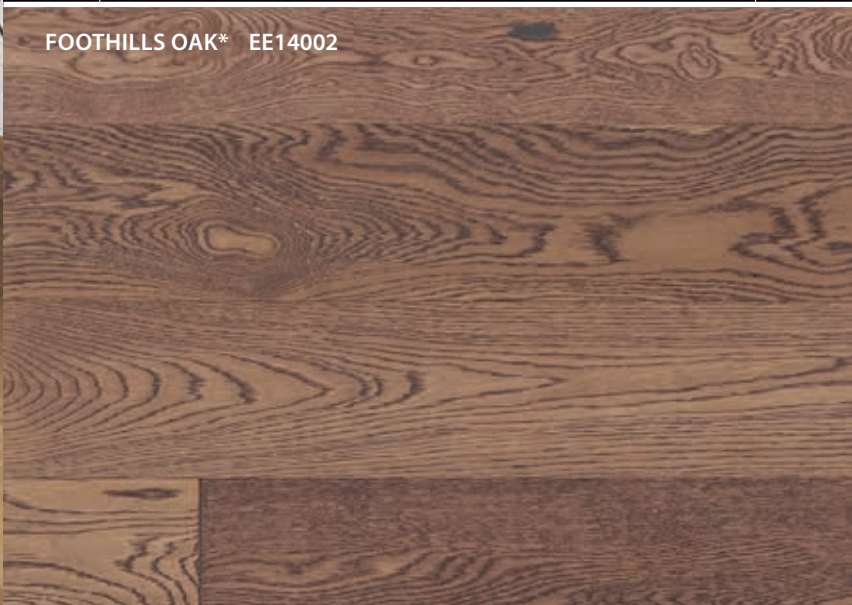


FOOTHILLS OAK* EE14002

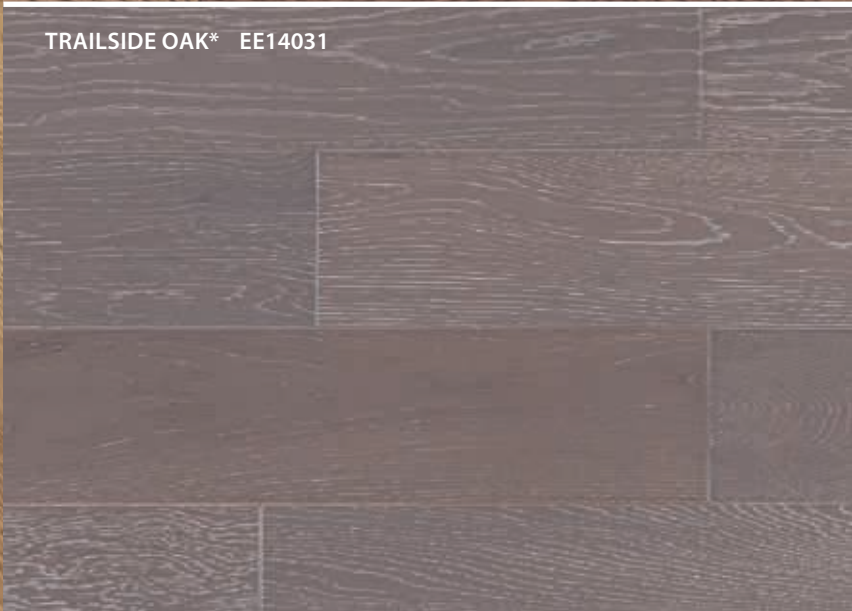

TRAILSIDE OAK* EE14031

SuperSolid 5 Hardwood

CANYON HILLS OAK* EE14032

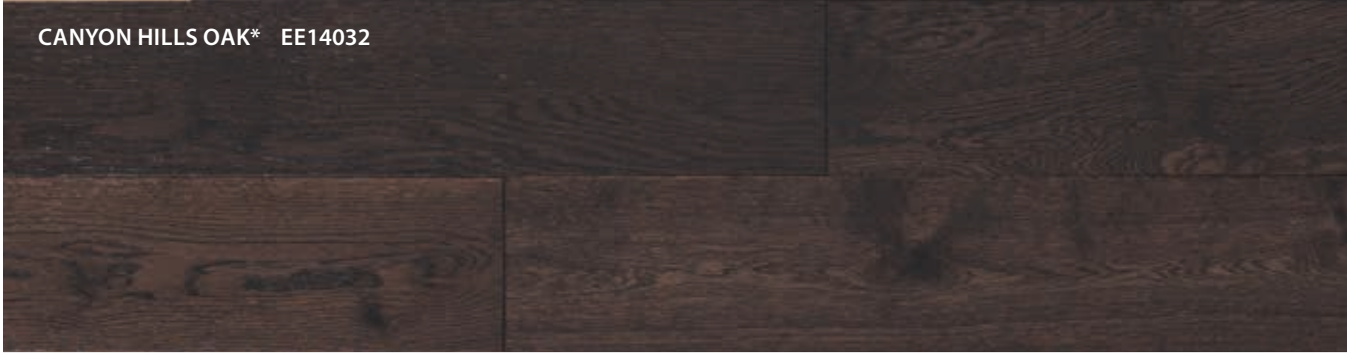

BROOKSIDE OAK* EE14034



Species

White Oak

Surface Finish

Wirebrushed

Trailside Oak*	EE14031
Canyon Hills Oak*	EE14032
Brookside Oak*	EE14034

Handscraped

Foothills Oak*	EE14002
Foxcroft Oak*	EE14240
Cove Springs Oak*	EE14241
Greenport Oak*	EE14242
Windcrest Oak*	EE14243

Wear Layer


**Guaranteed
re-sandable
up to 4 times**

* These floors have high shade variation. Visit torlys.com for more information.

3/4" (thickness) x 5" (width) x Random length (16" to 87")
19mm (thickness) x 127mm (width) x Random length (400mm to 2200mm)

SuperSolid 5 Hardwood


FOXCROFT OAK* EE14240

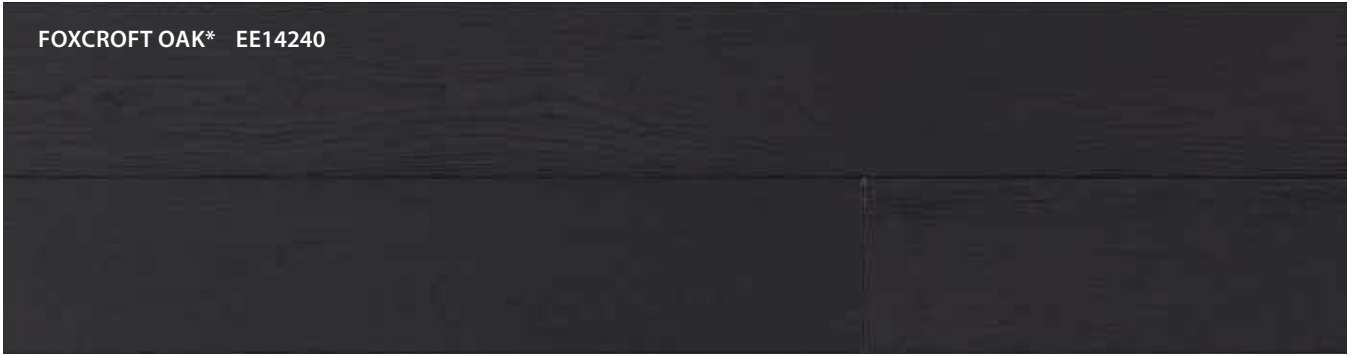


COVE SPRINGS OAK* EE14241



GREENPORT OAK* EE14242

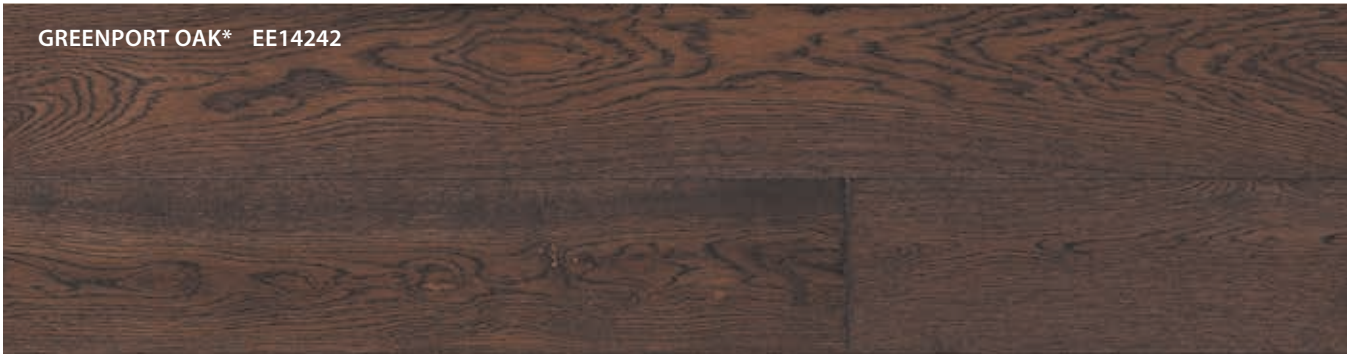

WINDCREST OAK* EE14243

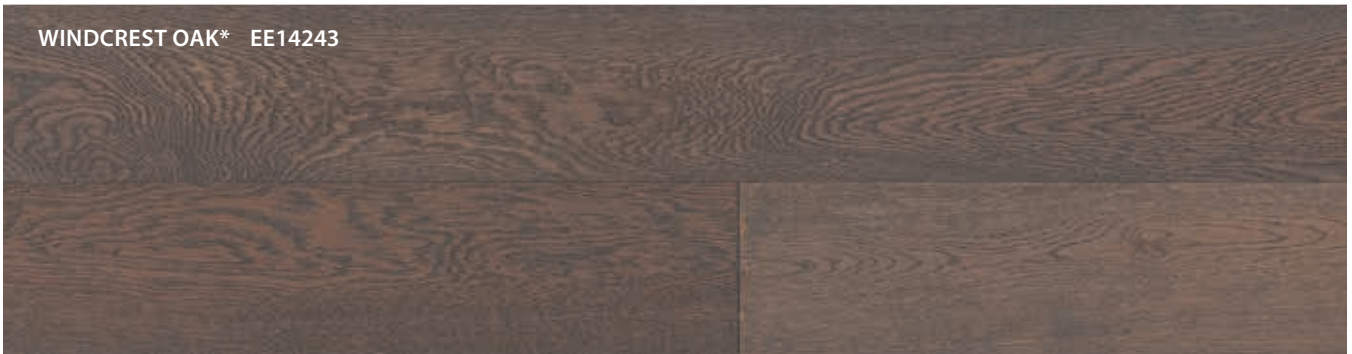

Impressive. Contemporary.
Hardwood.

Best-in-Class Benefits.



Warranty

SuperSolid Hardwood has a 25-Year Wear Warranty and a Lifetime Structural Warranty for residential use. A 5-Year Light Commercial and Lifetime Structural Warranty applies to light commercial applications. A Radiant Heat Warranty applies to all SuperSolid Hardwood.

Gap Resistant

E-Lock technology helps prevent ugly gaps from appearing in the cold and dry winter months.

Cup Resistant

E-Lock Technology provides superior cup resistance – no more unsightly planks.

Crack Resistant

Dry sawn wear layer resists the cracking or splitting common to solid hardwood.

Use on Any Level

Guaranteed to perform on any level in your home. Including basements.

Radiant Heat Safe

Unlike all other solid floors, SuperSolid floors are guaranteed over radiant heat.

Float, Nail, Glue

Precise milling and engineered construction makes SuperSolid versatile for any installation.

Re-sandable Wear Layer

The 4mm wear layer can be re-sanded up to 4 times for a lifetime of performance.

No Added Formaldehyde

No formaldehyde is added anywhere in the manufacturing process.

Forest Friendly


Creates 4 times more flooring from a single log than traditional 3/4" hardwood floors.

Recycled Core and Balance Layer

Produced primarily with post-industrial/pre-consumer recycled hardwood.

Best-in-Class Coating

The very latest nano-particle finish technology from KLUMPP. Since 1919, this industry-leader has provided the ultimate in wear-resistant, superior gloss retaining finishes.

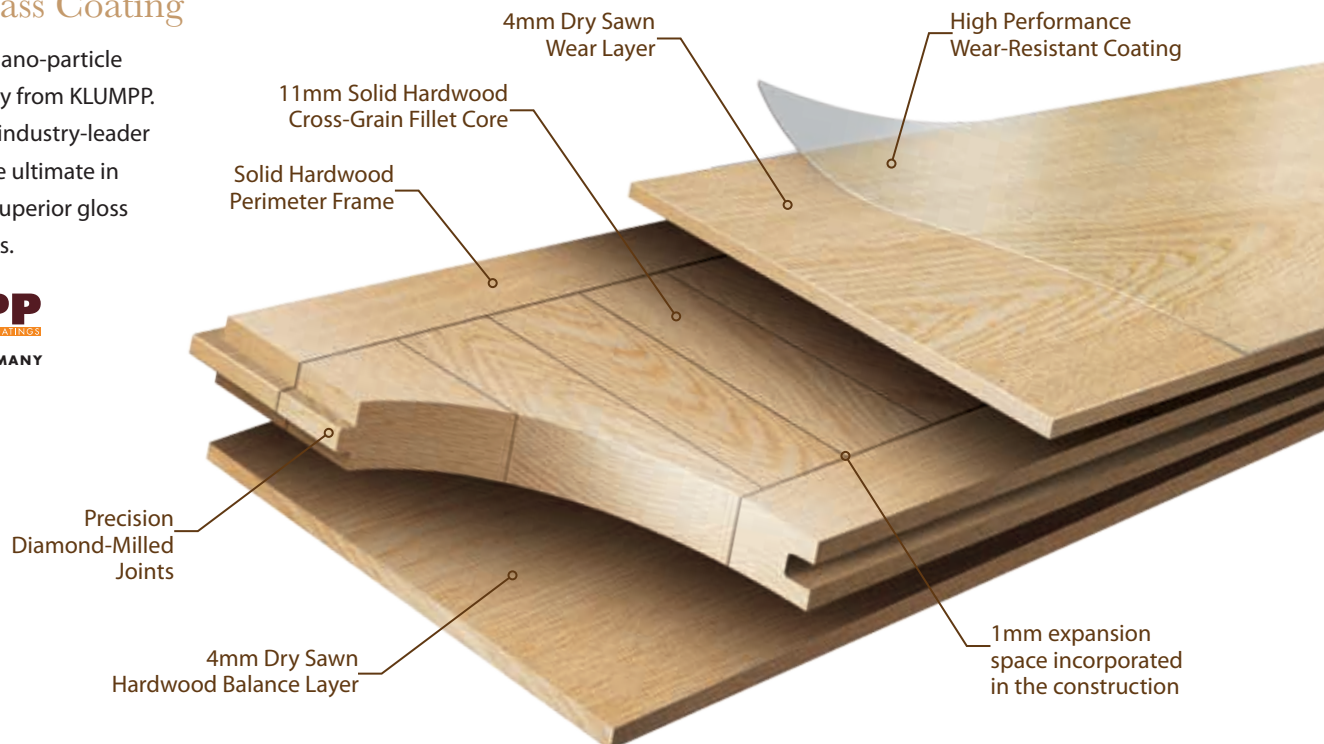

Better Floors for a Better World

4 times more flooring from a single tree than solid hardwood.

The Perfect Balance Between Mother Nature & Technology

Consistent, uniform & symmetrical construction create more stable floors.

Same Thickness

4mm

Both the top wear layer and the bottom balancing layer are made up of 4mm dry sawn hardwood.

Same Species

Oak or Birch

All three layers are constructed from the same species of wood.

Same Moisture

6-8%

All layers are calibrated to the exact same moisture content.

Cutting Edge Superiority.

SuperSolid

Dry Sawn Top Layer

The dry sawn method is a recognized industry “Best Practice” where solid hardwood is slowly dried to the desired 6-8% moisture content before it’s sawed.

- Looks identical to 3/4” solid hardwood flooring
- The 4mm ultra-thick wear layer can be sanded up to 4 times
- The natural beauty of the grain is preserved
- Individual boards are unique; no repeat pattern
- Resists cracking, splitting, and checking



The Competition

Rotary Peeled

The log is boiled and then peeled in an ultra-thin layer using a rotary cutter (the same method used to make plywood):

- Repetitive patterns similar to plywood.
- Thin wear layer; only one sanding or sometimes none.
- Wood wants to return to its curved shape resulting in splitting and cracking.

Sliced

Slicing uses a razor to cut logs flat. To slice correctly, the wood must be boiled or steamed which can weaken the structure of the wood and the floor.



Built for Life in North America.


Best Relative Humidity Performance Guarantee in the Industry!

A major problem with traditional solid hardwood – it can expand and contract when humidity levels change. Typically, the wider and longer the board, the more cupping and gapping problems you'll see.

SuperSolid Hardwood out-performs solid wood across a much larger range of relative humidity. Superior

engineering and advanced construction ensure cup and gap resistance even with extra long, wide planks.

SuperSolid Hardwood core panels are engineered to withstand warm temperatures. **They can be installed over radiant heat, guaranteed.** Refer to Radiant Heat Installation Instructions for more information.

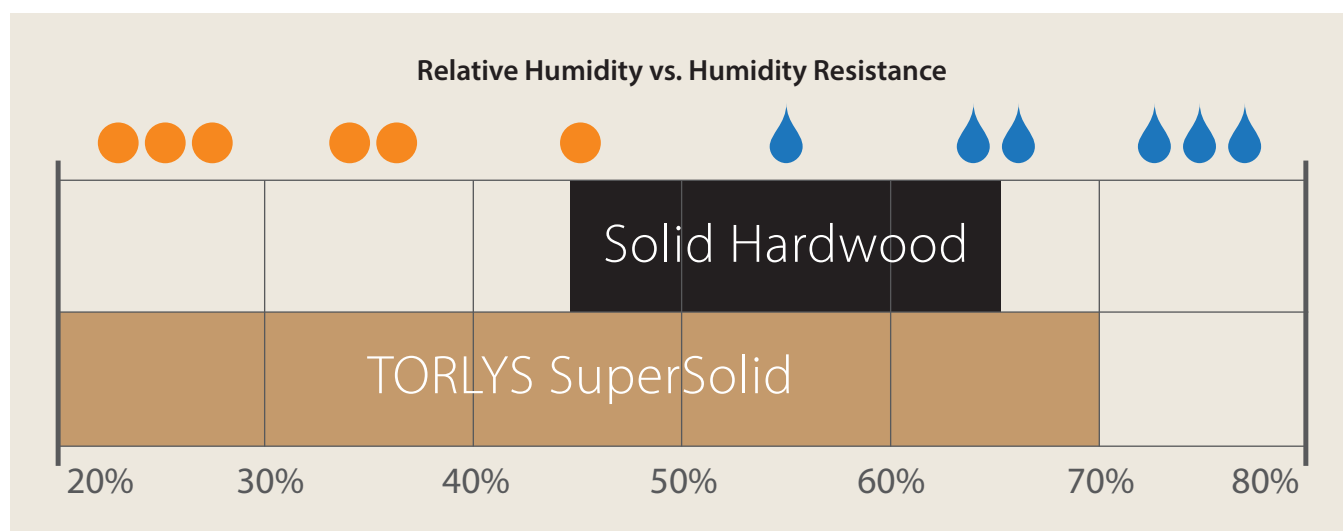

Traditional Solid Hardwood vs. SuperSolid Hardwood

• Solid hardwood construction	•
• Increases the resale value of your home	•
• Enhances the appearance & style of your décor	•
• Re-sandable	•
Glue down and floating installation	•
Gap & cup resistant	•
Twist, warp & crack resistant	•
Predominantly made from post-industrial recycled hardwood	•
Install below and above grade	•
Installs over radiant heat	•

Helps prevent gapping, cupping, twisting, warping and cracking.



Beautifully Finishing Your Floors.

TORLYS smartSTEP

TORLYS offers a unique smartSTEP moulding solution so you can add the perfect finishing touch to your installation. These stair treads are manufactured using a full flooring plank with a carefully crafted texture and colour-matched stair nose added, for a 100% perfect dimensional and visual match. For quick, easy and seamless installation, smartSTEP uses the same tongue & groove joint as your SuperSolid floor.



TORLYS DIRECT SHIP ACCESSORIES

Direct Ship Mouldings

TORLYS SuperSolid program has an extensive selection of colour co-ordinated mouldings, stair noses and vents to complete your installation.



QUARTER ROUND

Create subtle blends between wall base/vertical surface and hardwood floors.



T-MOULDING

Provide an attractive solution for transitioning between floor surfaces in adjoining rooms that approximately the same thickness.



WALL BASE

Creates a formal border transition between flooring and walls.




REDUCERS

Flush and overlap reducers allow for smooth transitions between floors of different heights.



STAIR NOSE

Flush and overlap stair nosings add a professional and finished look to stairways. Offered in traditional and euro nose profiles.



VENTS

Offered in surface mount and flush styles to provide a consistent and refined appearance to a wood floor.

Maintenance

- Dust mop or vacuum regularly to remove loose soil and wipe up spills quickly with cloth or sponge.
- Only use TORLYS maintenance products. Do not use wet mops, highly acidic or alkaline cleaners, non-recommended commercial cleaners or polishes, or a treated mop that has been used to clean other floors or furniture.
- Use floor-protector pads on furniture feet. Protect your floor from hard castors on moveable furniture.
- Use caution when wearing high heels as they can dent hardwood. Keep your pet's nails trimmed.
- Use entry-way (non-skid cotton) mats to capture tracked-in-dirt and soil, and clean them regularly. Rubber or fiber-backed mats may stain or scratch floor finish.

Maintain Humidity in Your Home

SuperSolid Hardwood floors have the best warranty in the business, from 20-70% RH. As a general rule for comfortable living, it is recommended to maintain the RH in your home between 40 and 60%.

TORLYS Natural Glow® Eco-Friendly Cleaning Kit

TORLYS eco-friendly cleaning products are biodegradable (with no VOCs) and fragrance free. Clean your floor as required with this easy-to-use kit. All products are available at your local TORLYS dealer.



—TORLYS—
S U P E R S O L I D
H A R D W O O D

torlys.com