

# Cork Vista

**TORLYS**  
smart floors



VINTAGE NATURAL



**LEED**®

**TORLYS**  
**Bulldog**  
EASY DI ANY DEGI APFO

# Cork Vista

**9.5mm x 194mm x 910mm**

**1.588 m2 per box  
66 boxes per pallet**

## Details

- Stunning visuals in traditional cork patterns
- Transition-Free up to 15m x 15m – float, nail or glue
- Industry leading glue less locking system by Uniclic®
- 4-sided bevel edge



## Better Performance

- TORLYS Maxx Finish offers stain and wear resistance with an antimicrobial surface
- Smart engineering guarantees durability, ensuring your floor will never need refinishing
- CorkPlus™ Blue attached underlay with Microban® antimicrobial product protection
- Suitable for use over underfloor heating
- FloorScore Equivalent

## More Sustainable

- Plastic Free - 100% natural product
- Being a natural product, we recommend sun filters on windows to reduce fading.
- FSC® Certified
- Made without cutting down any cork oak trees, ensuring forests remain undamaged
- TORLYS Bulldog™ enables single planks of Cork Vista to be replaced, quickly and easily. No mess, no dust, no downtime

Visit [torlys.co.nz](http://torlys.co.nz) for more information

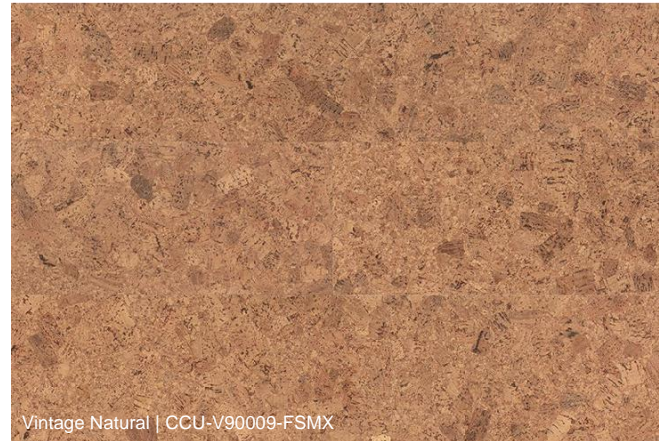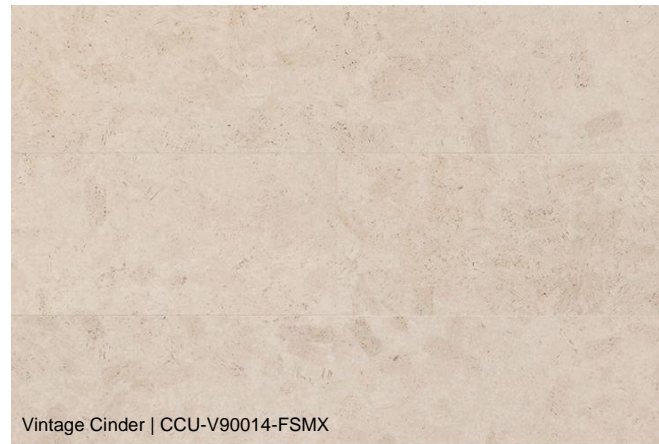

# A Cleaner Floor Starts Here.

Contribute to a cleaner home with built-in antimicrobial protection.

TORLYS Maxx Finish with built-in antimicrobial protection will keep your floors 99% cleaner between cleanings, 24/7.

For more information visit  
<https://torlys.co.nz/technical-information/cleaner-floors-maxx-finish/>



TORLYS CorkPlus™ Blue with Microban® offers safe and effective protection against the growth of mold and mildew under your floors.



VINTAGE CINDER

## Finishing Touches

### TORLYS Smart Trims

A Multi-Function Transition Moulding that offers an adaptable and colour coordinated profile. Suitable for floating applications.\*

### TORLYS Smart Step Moulding

A unique stair nosing solution to add the perfect finishing touch. TORLYS smartSTEP is made from a full piece of actual flooring, with the same Uniclic® joint as your floor for an easy and seamless installation. Suitable for both floating and nail/glue down applications.\*

*\*Please reference product specific installation instructions for details.*

## Sustainability

TORLYS Smart Floor has two lives. Cork<sup>xp</sup> is made from recyclable products, plus years down the road when you want to change your floor, it can be reused in another room.

## Warranty – No Water Surface Warranty

25-year Residential Product Warranty

5-Year Commercial Warranty

*A combination of heat and sunlight can cause natural flooring to fade or change colour. Sun filters recommended. Visit <https://torlys.co.nz/residential-warranty/> for warranty details.*

## Easy Maintenance

Cork ensures easy ongoing maintenance using our EcoCare cleaner\*


\*Visit <https://torlys.co.nz/maintenance/> for details.

## ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648	Critical Radiant Flux	Average Critical Radiant Flux: 0.28 W/cm <sup>2</sup>	(NFPA 101 Classification: Class 2)
ASTM E662	Optical Density of Smoke	Pass ≤450	
ASTM E84	Surface Burning	Flame Spread Index: 20 Smoked-Developed Index: 60	(ASTM E84 Class A)
AATCC 30-III (TM 30-III Aspergillus Niger)	Antifungal Assessment and Mildew Resistance Test	Pass = Not supportive of fungal growth	
ANSI A137.1-2012 (aka DCOF AcuTest)***	Coefficient of Friction (Floor Slip Resistance)	Average DCOF (wet): 0.48	
ASTM F970	Static Load Limit / Residual Indentation @ 250 PSI Static Load Limit / Residual Indentation @ 1000 PSI	0.008 inch 0.023 inch	
ASTM D2394	Falling Ball Indentation Test @ 72 Inches Drop	0.014 inch = no Fracture of surface or interior material	
ASTM F1914	Short Term Indentation and Residual Indentation	Residual Indentation @ 75 lbs: 0.011 inch	
EN 14354:2017	Determination of the Wear Resistance Using the Falling Sand Method	> 6000 revolutions	
ASTM C518	Thermal Resistance - Imperial Units Thermal Resistance - SI Units	0.508 °F·ft <sup>2</sup> h/BTU 0.0894 (m <sup>2</sup> K)/W	
ASTM F925	Resistance to Chemicals	0 = No Change*	*(11 of 12 chemicals)
ASTM F1515	Resistance to Light	Gray Scale Rating: 1	(Test result after 300 hours exposure)
ASTM E492-09 (2016)e1 / ASTM E989 - 18	Impact Insulation Class	IIC 71	
ASTM E90-09 (2016) / ASTM E413 - 10	Sound Transmission Coefficient	STC 64	
ASTM E2179	Delta IIC	22	

\*\*\*Note: Replaces ASTM C1028-07, withdrawn by ASTM in 2014

## How It's Made

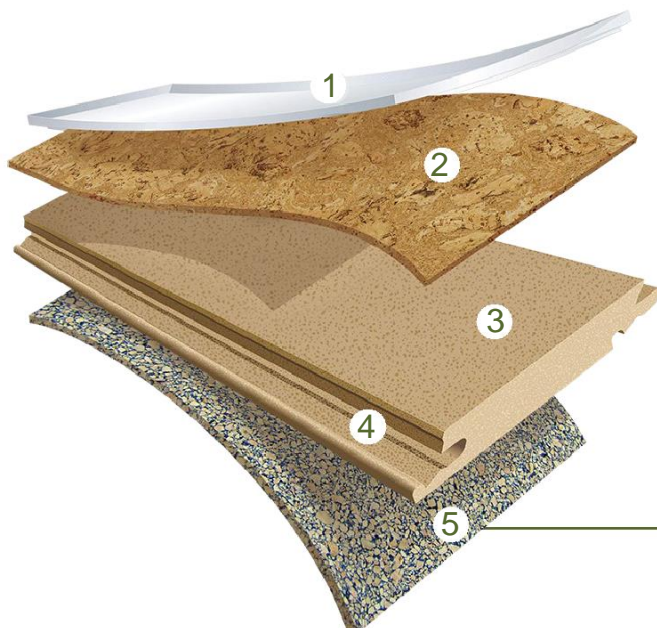

1. TORLYS Maxx Finish (Antimicrobial | Anti-Wear)
2. 2.5mm Cork Layer cork layer
3. Low swell TORLYS™ Smart Core with dent resistance and dimensional stability
4. Uniclic® joint. The most advanced, gap-resistant joint system available today
5. TORLYS CorkPlus™ Blue underlayment with Microban® antimicrobial product protection

MADE IN PORTUGAL